

THE GAS TURBINE: AE94.3A


Proven technology for efficient power generation

15 stages axial compressor with variable guide vanes*

Single shaft, internally **air-cooled rotor**, disk type with Hirth serration and central tie rod

Rotor Displacement System (RDS) for gap optimization

Cold-end generator

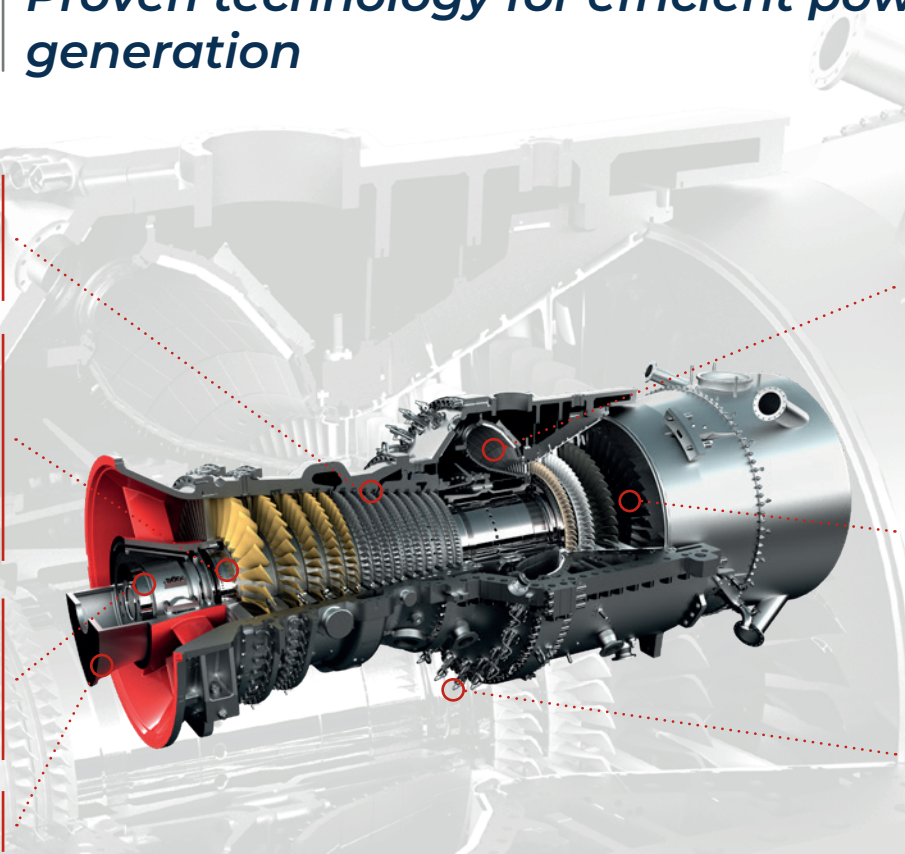

Annular type Combustion Chamber lined with individually replaceable tiles

4 stages, **air cooled** turbine, axial discharge, advanced cooling technique*

24 dry low NOx burners for premix operation both for gas and for oil mode

**All vanes and blades replaceable with rotor in place.*

Fast, flexible and cost effective

The simple and robust design of the AE94.3A has made it possible to accommodate continuous upgrades over the years, progressively enhancing performance while maintaining and even improving the level of reliability (> 99.5%). Its balanced thermal distribution throughout the entire engine combined with its extreme operating simplicity enables high cycling capability. It can be started and stopped without any time limitation and reach base load in approx. 20 minutes, a key factor for grid stability and peak plants.

Multi fuel and Hydrogen capable

A wide selection of fuels can be used, ranging from natural gas with hydrocarbons in several proportion or with hydrogen content up to 40% vol, up to liquid fuels such as Diesel Oil, High Speed Diesel and Naphtha.

2 units fed with hydrogen enriched off gas in Commercial Operation since 2006, with more than 250.000 EOH.

Environmental sustainable

NOx level down to **15 ppm in dry gas mode** and **60 ppm in dry oil mode** (with possibility to reach **25 ppm** with small water amount .

Smart maintenance approach

- Extended time between major overhauls (up to 5 years, depending on operating conditions)
- High durability of hot gas path parts
- Quick on-site activities

One of the easiest and low-cost maintenance solution for class F gas turbines available nowadays.

Customized service agreements, including upgrading packages, allow Customers to choose the best solution to fit their needs.

Natural gas ISO conditions	AE94.3A Performance	Power Plant Configuration	1+1	2+1
Power output (MW)	340	CC Net Output (MW)	495	992
Efficiency (%)	40.3	CC Net Efficiency (%)	60	60.3
Exhaust Mass Flow (Kg/s)	755	CC Net Heat Rate (kJ/kWh)	5,995	5,970
Exhaust Temperature (°C)	593	Plant Turndown	45	25
GT minimum load (%)	40	Minimum load (%)		

General note: Performance data are calculated with 100% methane (LHV) at ISO conditions, direct cooling.

References:

80 units in Combined Cycle, 16 units in Open Cycle

total > 4 millions EOH

Ansaldo Energia, all rights reserved. Trademarks mentioned in this document are the property of Ansaldo Energia, its affiliates, or their respective owners in the scope of registration. The information contained in this document is merely indicative. No representation or warranty is provided, nor should be relied on, that such information is complete or correct or will apply to any particular project. This will depend on the technical and commercial circumstances. Said information is provided without liability and is subject to change without notice. Reproduction, use or disclosure to third parties, without express written authority, is strictly prohibited.

Via N. Lorenzi, 8 - 16152 Genoa - Italy
 Tel: +39 010 6551
 info@ansaldoenergia.com
 ansaldoenergia.com